




VidyoH2O™ for Google+ Hangouts

Conference room and voice interoperability

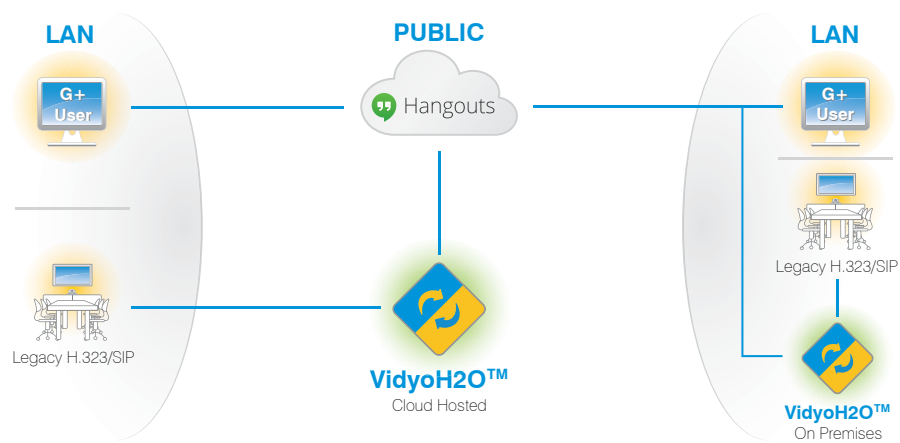

With a subscription to VidyoH2O for Google+ Hangouts™, people can participate in your Hangout from any H.323 or SIP-capable video conferencing system, or dial in for voice-only participation from any phone with PBX integration. There's no equipment to buy and no per-minute charges: your subscription delivers unlimited conferencing interoperability for a flat fee. With support for both on-premises and cloud hosted deployment options, VidyoH2O for Google+ Hangouts offers unbeatable flexibility, performance, and value.

Key Features

Intuitive User Experience

- Makes Google+ Hangouts conferences accessible to H.323 and SIP-based endpoints from Polycom, Cisco/Tandberg, LifeSize, and others
- Share content between legacy room systems and Google+ Hangouts
- Supports voice-only participation with IP PBX integration
- Every participant benefits from automatic rate and resolution matching
- Customizable Interactive Voice Response (IVR) features guide and simplify connection tasks

Easy to Deploy and Secure

- Simplify administration, configuration and maintenance with web-based interface
- IP address filtering modes for access control
- Leverage built-in security management: SSL certificates, private key management, NAT and firewall traversal, and HTTPS

Specifications

VidyoH2O™ for Google+ Hangouts

Per-Instance Capacity	5 room systems connected simultaneously, each at up to 720p30 Up to 15 participants in each Hangout 50 audio-only connections
Protocols and Standards	Video: VP8, H.263, H.264 Audio: G.711, G.722 Signaling: H.323, SIP Data Sharing: Google, H.239, BFCP Encryption: SRTP, H.235 AES (H.323) and TLS (SIP)
Power Supply	Input: 100-240v ~ 3.5A, 50-60Hz Output: 2x 550W Redundant (auto-ranging, Platinum efficiency) Consumption: 112W (idle), 210W (full load) Dissipation: 245 BTU (idle), 645 BTU (full load)
Physical	Dimensions Height: 1.69" (42.8 mm) Width: 17.09" (434.0 mm) Depth: 25.28" (642.3.1 mm) Weight: 43.87 lbs (19.9 kg) Form Factor: 1U Rack mount (ReadyRails™ sliding rails included)
Network	2x RJ45 LAN ports: 100BASE-TX, and 1000BASE-T
Environment	Operating Temperature Range: 10° to 35°C (50° to 95°F) Non-Operating Temperature Range: -40° to 70°C (-40° to 158°F) Operating Humidity Range: 8% to 90% non-condensing Non-Operating Humidity Range: 5% to 95% non-condensing
Regulatory	Safety: EN 60950-1:2006 / IEC 60950-1:2005 ed2 EMC: EN 55022:2006 +A1:2007 / CISPR 22:2005 +A1:2005 EN 55024:1998 +A1:2001 +A2:2003 / CISPR 24:1997 (modified) +A1:2001 +A2:2002 EN 61000-3-2:2006 / IEC 61000-3-2:2005 (Class D) EN 61000-3-3:1995 +A1:2001 +A2:2005 / IEC 61000-3-3:1994 +A1:2001 +A2:2005 Australia C-TICK Class A, Argentina IRAM; Canada NRTL ICES Class A; China CCC Class A; Croatia KONCAR Class A; EU CE Class A; Germany TÜV ; IECEE IECEE CB; Israel SIL Class A; Japan VCCI Class A; Mexico NOM; Moldova INSM Class A; Nigeria SONCAP; Norway NEMKO Class A; Russia GOST Class A; South Africa NRCS SABS Class A; South Korea KC Class A; Taiwan BSMI Class A; United States NRTL FCC Class A; Vietnam ICT Class A



Vidyo, Inc. (Corporate Headquarters)

433 Hackensack Ave., Hackensack, NJ 07601, USA
Tel: 201.289.8597 Toll-free: 866.998.4396
Email: vidyoinfo@vidyo.com

EMEA

emea@vidyo.com
+33 (0) 488 718 823

APAC

apac@vidyo.com
+852 3478 3870

INDIA

india@vidyo.com
+91 124 4111671